
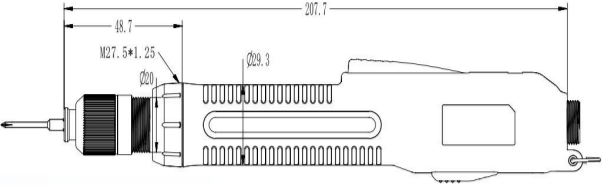
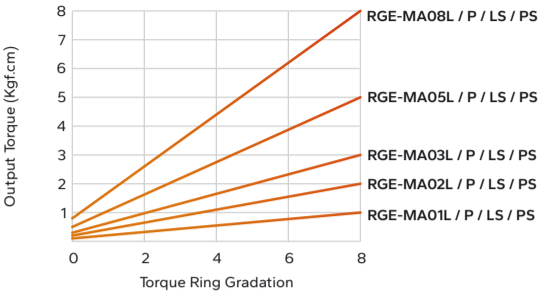

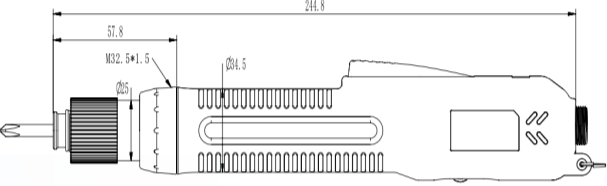
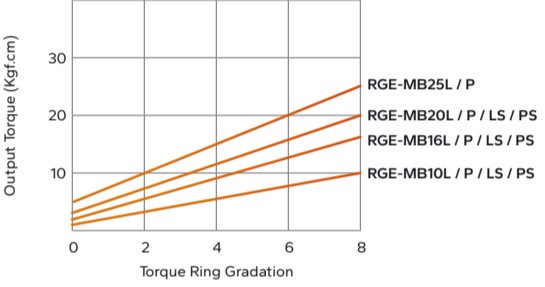

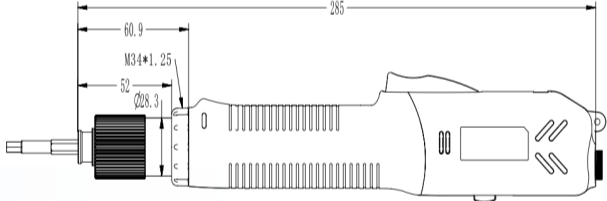
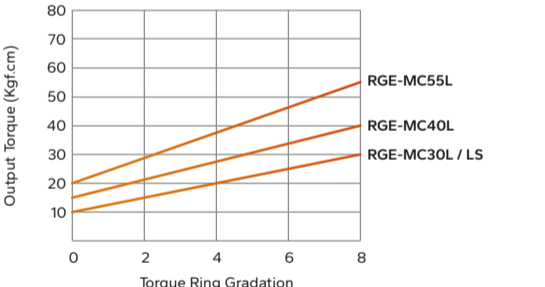

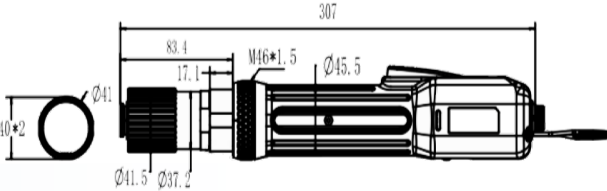
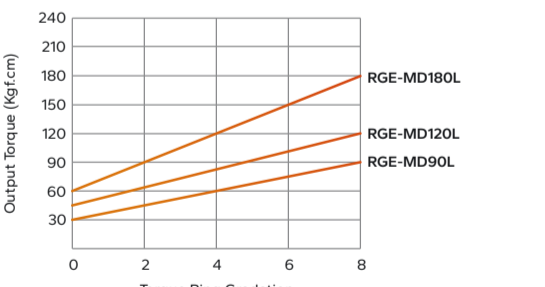

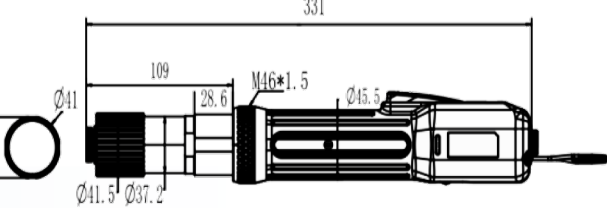
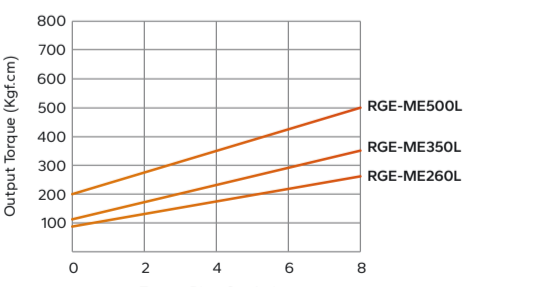


Brushless Electrical Torque Screwdriver

Technical Data of All Models

Models	Input Voltage (DC)	Power Usage	Torque			Repeatable Torque Accuracy (%)	Torque Adjustment	No-Load Speed (rpm)	Screw Size Diameter (mm)		Type	Weight (g)	Length (mm)	Power Controller	Bit Type
			kgf.cm	Nm	Lbf.in				Machine Screw	Self-Tapping Screw					
  															
MA Series															
RGE-MA01L/P	DC 30V	25W	0.1-1.0	0.0098-0.098	0.087-0.867	±5	Stepless	1000	1.0-1.5	1.0-1.5	L & LS - Lever Start P & PS - Push Start	280	208	PRO-3M/G V2.0	Ø4 / Ø5 / HEX6.35 (1/4")
RGE-MA01LS/PS								1500							
RGE-MA02L/P			0.2-2.0	0.0196-0.196	0.1734-1.734			1000	1.0-2.3	1.0-2.0					
RGE-MA02LS/PS								1500							
RGE-MA03L/P			0.3-3.0	0.029-0.29	0.260-2.61			1000	1.0-2.3	1.0-2.0					
RGE-MA03LS/PS								1500							
RGE-MA05L/P			0.5-5.0	0.049-0.49	0.434-4.33			1000	1.4-2.6	1.4-2.3					
RGE-MA05LS/PS								1500							
RGE-MA08L/S			1.0-8.0	0.098-0.78	0.867-6.94			1000	1.6-3.0	1.6-2.6					
RGE-MA08LS/PS	1500														
  															
MB Series															
RGE-MB10L/P	DC 30V	45W	1-10	0.098-0.98	0.867-8.68	±5	Stepless	1000	2.0-3.0	1.6-2.6	L & LS - Lever Start P & PS - Push Start	540	245	PRO-3M/G V2.0	Ø5 / HEX5 / HEX6.35 (1/4")
RGE-MB10LS/PS								2000							
RGE-MB16L/P			2-16	0.196-1.57	1.734-13.87			1000	2.3-3.5	2.0-3.0					
RGE-MB16LS/PS								2000							
RGE-MB20L/P			3-20	0.294-1.96	2.601-17.34			1000	2.6-4.0	2.6-3.5					
RGE-MB20LS/PS								2000							
RGE-MB25L/P	5-25	0.490-2.45	4.339-21.69	1000	3.0-4.5	2.6-4.0									
  															
MC Series															
RGE-MC30L	DC 36V	100W	10-30	0.98-2.94	8.67-26.1	±5	Stepless	900	2.6-4.0	2.6-3.5	Lever	840	285	PRO-5M	HEX6.35 (1/4")
RGE-MC30LS								2000							
RGE-MC40L			15-40	1.47-3.92	13-34.68			900	3.0-4.5	2.6-4.0					
RGE-MC55L								500							
  															
MD Series															
RGE-MD90L	DV 40V	360W	30-90	2.94-8.82	26.03-78-17	±5	Stepless	820	≤6	≤4.5	Lever	1380	307	PRO-9M	1/4" Hex / 3/8" Sq Dr
RGE-MD120L			40-120	3.92-11.76	34.72-104.16			820	≤8	≤6					
RGE-MD180L			60-180	5.88-17.65	52.08-156.23			335	≤10	≤8					
  															
ME Series															
RGE-ME260L	DC 40V	440W	80-260	7.84-25.5	69.44-225.67	±5	Stepless	335	≤11	≤9	Lever	1510	331	PRO-9ML	1/4" Hex / 3/8" Sq Dr / 1/2" Sq Dr
RGE-ME350L			120-350	11.77-34.32	104.16-303.79			190	≤12	≤10					
RGE-ME500L			200-500	19.61-49.03	173.59-433.98			190	≤14	≤12					